


V-STRUM 1050

SPECIFICATIONS

V-STRUM 1050

Engine type	4-stroke, liquid-cooled, DOHC, 90° V-twin	
Bore x stroke	100.0 mm x 66.0 mm	
Engine displacement	1,037cm ³	
Compression ratio	11.5:1	
Fuel system	Fuel injection	
Starter system	Electric	
Lubrication system	Wet sump	
Transmission	6-speed constant mesh	
Suspension	Front	Inverted telescopic, coil spring, oil damped
	Rear	Link type, coil spring, oil damped
Brakes	Front	Disc, twin
	Rear	Disc
Tyres	Front	110/80R19M/C 59V tubeless
	Rear	150/70R17M/C 69V tubeless
Rake / trail	25°40' / 110 mm	
Fuel tank capacity	20.0 L	
Ignition system	Electronic ignition (transistorized)	
Overall length	2,265 mm	
Overall width	940 mm	
Overall height	1,515 mm	
Wheelbase	1,555 mm	
Ground clearance	165 mm	
Seat height	855 mm	
Curb mass	242kg	

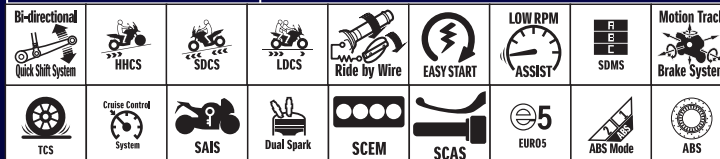

BIKE FEATURES



ACCESSORIES



COLOUR OPTIONS



Pearl Vigor Blue / Metallic Mat Black No.2 (CGI)



Glass Blaze Orange / Metallic Mat Black No.2 (CGH)



SUZUKI MALAYSIA SDN. BHD.

(Sole Importer / Assembler / Distributor for Suzuki Motorcycles, Scooters, ATV, Spare Parts & Accessories)

No. 12 & 14, Jalan Jurunilai U1 / 20, Seksyen U1, HICOM Glenmarie Industrial Park, 40150 Shah Alam, Selangor Darul Ehsan. Tel : +603 - 5566 5688 Fax : +603 - 5566 5699

[f suzukimalaysia](https://www.facebook.com/suzukimalaysia)
[suzukimalaysiasb](https://www.instagram.com/suzukimalaysiasb)
[suzukimalaysia1](https://www.linkedin.com/company/suzukimalaysia1)
[suzuki.com.my](https://www.suzuki.com.my)
[Official Suzuki MY](https://www.suzuki.com.my)





V-STRUM 1050

The Master of Adventure

For Wherever Your Journey Takes You



All pictures for illustration purposes only.