



GSX-R


The New Standard of Sport



SPECIFICATIONS

Engine type	4-stroke, 2-cylinder, liquid-cooled, DOHC
Bore × Stroke	84.0 mm x 70.0 mm
Engine displacement	776 cm ³
Compression ratio	12.8 : 1
Fuel system	Fuel injection
Starter system	Electric
Lubrication system	Forced feed circulation, wet sump
Ignition system	Electronic ignition (transistorized)
Fuel tank capacity	14 L
Oil capacity (Overhaul)	3.9 L
Fuel consumption	23.8 km/L
Transmission	6-speed constant mesh
Front suspension	Inverted telescopic, coil spring, oil damped
Rear suspension	Link type, coil spring, oil damped
Front brake	Disc, twin
Rear brake	Disc
Front tire size	120/70ZR17M/C (58W) tubeless
Rear tire size	180/55ZR17M/C (73W) tubeless
Rake / Trail	25° / 104 mm
Overall length	2,155 mm
Overall width	770 mm
Overall height	1,135 mm
Wheelbase	1,465 mm
Ground clearance	145 mm
Seat height	810 mm
Curb mass	205 kg

BIKE FEATURES

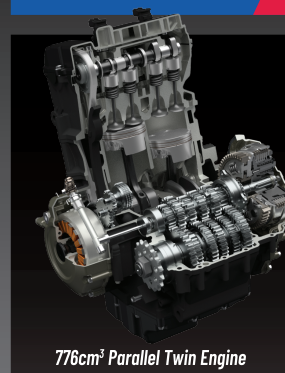


776cm³ Parallel Twin Engine




Clutchless Shifting



Distinctive Short Muffler Design

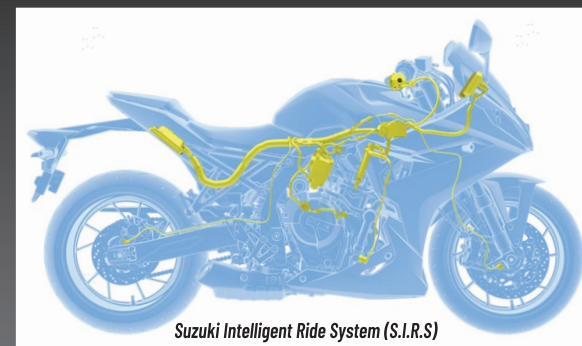

Suzuki Intelligent Ride System (S.I.R.S.)

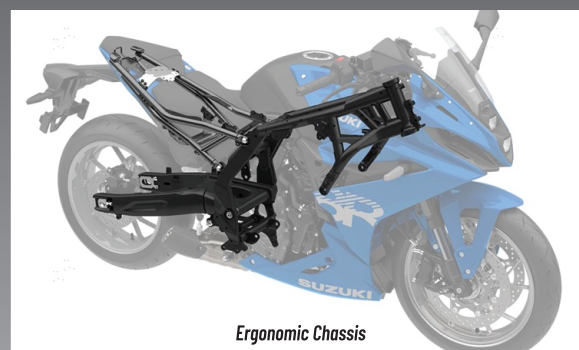

Ergonomic Chassis



Cast Aluminum Wheels



LED Headlights & Position Light




Optimized Front & Rear Suspension



Full LCD Instrument Panel

COLOUR OPTIONS



Metallic Triton Blue



Metallic Matte Sword Silver



SUZUKI MALAYSIA SDN. BHD.

202001012115 (1368435-X)

(Sole Importer / Assembler / Distributor for Suzuki Motorcycles, Scooters, ATV, Spare Parts & Accessories)

No. 12 & 14, Jalan Jurunilai U1 / 20, Seksyen U1, HICOM Glenmarie Industrial Park, 40150 Shah Alam, Selangor Darul Ehsan. Tel : +603 - 5566 5688 Fax : +603 - 5566 5699



suzukimalaysia



suzukimalaysiasb



suzukimalaysia1



suzuki.com.my



Official Suzuki MY

