



V-STRON 800

All Roads Merge



SPECIFICATIONS

Engine type	4-stroke, 2-cylinder, liquid-cooled, DOHC
Bore × Stroke	84 mm x 70 mm
Engine displacement	776 cm ³
Compression ratio	12.8 : 1
Fuel system	Fuel injection
Starter system	Electric
Lubrication system	Forced feed circulation, wet sump
Ignition system	Electronic ignition (transistorized)
Fuel tank capacity	20 L
Oil capacity (Overhaul)	3.9 L
Fuel consumption	22.7 km/L
Transmission	6-speed constant mesh
Front suspension	Inverted telescopic, coil spring, oil damped
Rear suspension	Link type, coil spring, oil damped
Front brake	Disc, twin
Rear brake	Disc
Front tire size	110/80R19M/C 59V tubeless type
Rear tire size	150/70R17M/C 69V tubeless type
Rake / Trail	26°/ 124 mm
Overall length	2,255 mm
Overall width	905 mm
Overall height	1,355 mm
Wheelbase	1,515 mm
Ground clearance	185 mm
Seat height	825 mm
Curb mass	223 kg

BIKE FEATURES




776cm³ Parallel Twin Engine



Clutchless Shifting



Suzuki Cross Balancer

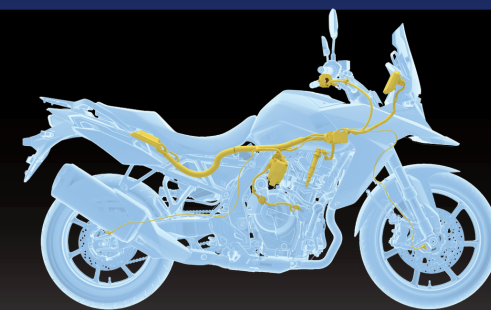


Suzuki Intelligent Ride System (S.I.R.S.)



19 inch Front Tire



20 L Fuel Tank



USB Port



LED Headlights & Position Light



Full LCD Instrument Panel

COLOUR OPTIONS



Pearl Vigor Blue (YKY)



Glass Sparkle Black (YVB)



SUZUKI MALAYSIA SDN. BHD.

(Sole Importer / Assembler / Distributor for Suzuki Motorcycles, Scooters, ATV, Spare Parts & Accessories)

No. 12 & 14, Jalan Jurunilai U1 / 20, Seksyen U1, HICOM Glenmarie Industrial Park, 40150 Shah Alam, Selangor Darul Ehsan. Tel : +603 - 5566 5688 Fax : +603 - 5566 5699



suzukimalaysia



suzukimalasyiasb



suzukimalaysia1



suzuki.com.my



Official Suzuki MY

